



Product data sheet, March 2014

Makrolon® multi UV 2/6-6

Multiwall polycarbonate sheet



Your benefits:

- high impact strength
- cold-bendable
- ideal for barrel vaults

Makrolon® multi UV 2/6-6 is a twinwall polycarbonate sheet of 6 mm thickness. It combines high light transmission, thermal insulation and excellent weather resistance. The sheet is lightweight, impact resistant and easy to install.

Makrolon® multi UV 2/6-6 is ideal for cold-curved barrel vaults. It can also be installed as flat glazing.

- porches, shelters
- covered walkways
- swimming pool covers
- greenhouses
- partition walls
- industrial glazing
- skylights, northlight glazing
- roofing


The manufacturing width of 2,100 mm is particularly suitable for sections that are cut to size across the width.

The sheets are produced with a coextruded UV-protective layer, which is homogeneously fused with the sheet material. This UV-protected side must be installed facing upwards/outwards. It provides **Makrolon® multi UV** with a highly effective protection against weathering, guaranteed for 10 years.

TECHNICAL DATA (TYPICAL VALUES)		
Area weight	1.3 kg/m ²	
Sheet width	2,100 mm	
Possible delivery lengths	2,000 to 12,000 mm	
Minimum permissible cold-bending radius ⁽¹⁾	900 mm	
Light transmittance τ_{D65} (UV-absorbing)	clear 1099: white 1125: white 1146: bronze 1845: green 1650: blue 1545:	ca. 79 % ca. 21 % ca. 77 % ca. 48 % ca. 55 % ca. 42 %
Coefficient of thermal expansion α	0.065 mm/m °C	
Possible expansion due to heat and moisture	3 mm/m	
Max. service temperature without load	120°C	
Weighted sound reduction index	17 dB (ISO 717 Part I)	
Fire rating ⁽²⁾		
• Europe	clear 1099, white 1146 bronze 1845	B-s1, d0 (EN 13501-1)
• Germany	clear 1099 & white 1146 bronze 1845	B1 (DIN 4102) B2 (DIN 4102)

⁽¹⁾ The cold-bending must be parallel to the ribs of the sheets, never crosswise (risk of buckling).

⁽²⁾ Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards, except for Product rated "B1" in accordance with DIN 4102.

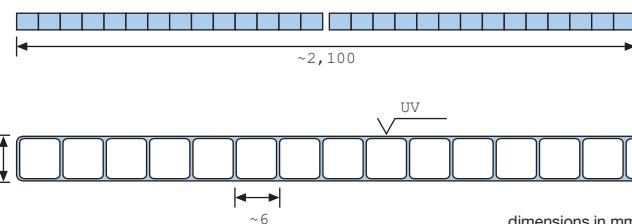

Product Liability Clause: This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.



Makrolon® multi UV 2/6-6

Multiwall polycarbonate sheet



Bayer MaterialScience S-Line, the standard product line, represents a range of certified quality products which offer the reliable solution for most applications.


If **Makrolon® multi UV 2/6-6** is used in applications of roofing or walling, the forces applied by wind and snow loads must be absorbed by a suitable sub-structure. We recommend taking the support distance for each load from the diagram.

The diagram shows the load bearing capacity for **Makrolon® multi UV 2/6-6** (supported on all sides, rebate depth ≥ 20 mm). If the rebate depth is smaller, the support distances should be reduced suitably for the given load. For pure wind loads the loads may be increased by a factor of 1.1.

If sufficiently stable profiles are used, the load increases by a factor of 1.2. 1,050 mm width is measured in a two-field arrangement of a 2,100 mm wide sheet. You can find further sheet widths and statements on barrel vaults in the Technical Manual.

Load bearing characteristics (determination):


The system resistance (boundary state of load bearing capacity) of **Makrolon® multi UV 2/6-6** was determined in accordance with European guideline ETAG 10 (European Technical Approval on "self-supporting light-transmitting roofing systems", which came into force in September 2002) in real tests. The characteristic values of system resistance were determined in an unfavorable system, i.e. the sheets were not fixed, but laid loosely. The loads are applied as uniformly distributed linear loads, i.e. load components acting vertically on the sheet, e.g. snow.

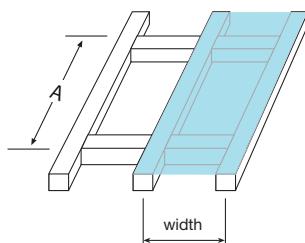

These values are guide values, which were determined in extensive tests on real systems carried out by the KPF in Erkelenz/Germany (testing, monitoring and certification centre recognized by the building inspectorate). Adequate safety values, which should be assessed on a case-by-case basis, are to be observed with regard to these values.

In general, experience has shown that a safety factor of 1.3 is adequate with regard to the measured resistance values. This safety factor is included in the load table and the diagram.

These statements do not replace the specified national certificates, e.g. building inspectorate approval (Bauaufsichtliche Zulassung Germany), Avis Techniques (France), etc.

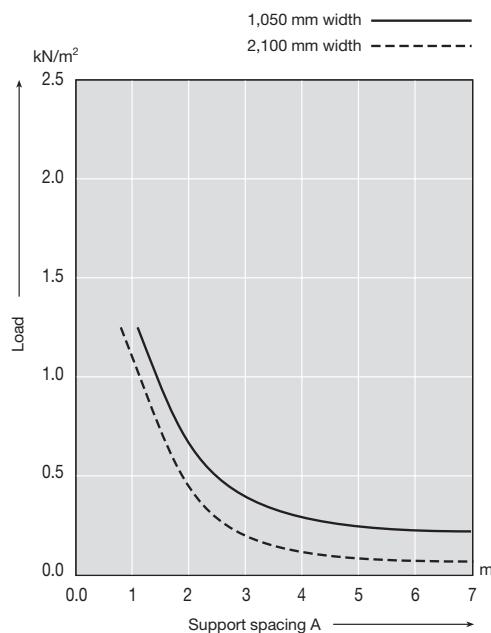

Load	kN/m ²	0.5	0.75	1.0	1.25	Width in mm
Length or support spacing A	m	2.4	1.8	1.5	1.1	1,050
	m	1.9	1.5	1.2	0.8	2,100

Bayer MaterialScience also produces solid sheets in polycarbonate (Makrolon® GP) and in polyester (Vivak® and Axpet®). For more information, take a look at www.bayersheeteurope.com.



Bayer MaterialScience

Bayer MaterialScience GmbH
Otto-Hesse-Straße 19/T9, 64293 Darmstadt, Germany
Tel. +49 6151 13 03-0
Fax +49 6151 13 03-500

www.bayersheeteurope.com